



TECHNICAL INFORMATION

AVX STATICGUARD PERFORMANCE COMPARISON TO SOT-23 SMT DIODES

Ron Demcko
Application Engineering Manager
AVX Corporation
Raleigh, NC

Abstract:

AVX StaticGuard is designed to provide transient protection for MSI to VLSI CMOS circuitry. This article presents performance characteristics of low energy MLV transient voltage suppressors relative to low energy silicon diodes. All major parameters are described, including leakage current, clamping voltage, capacitance, peak current and repetitive strike performance. AVX StaticGuard is shown to have superior performance to SOT 23 diodes in transient suppression applications.

AVX STATICGUARD PERFORMANCE COMPARISON TO SOT-23 SMT DIODES

AVX StaticGuard offers significant performance advantages over all SOT-23 package type TVS devices.


Among the advantages are:

Electrical

- StaticGuard meets IEC 801-2, Level 4 and IEC801-4, Level 4.
- StaticGuard has the fastest response time in the industry $\ll 1\text{ns}$.
- StaticGuard can withstand repetitive ESD and high current strikes without performance degradation.
- StaticGuard exhibits a capacitance which can be used as an EMI/RFI filter.
- High in rush current capability up to 30A.

Physical

- StaticGuard is the smallest surface mount TVS suppressor in the industry and can be placed at the entry point of a transient.
- StaticGuard is easily picked and placed with standard equipment.

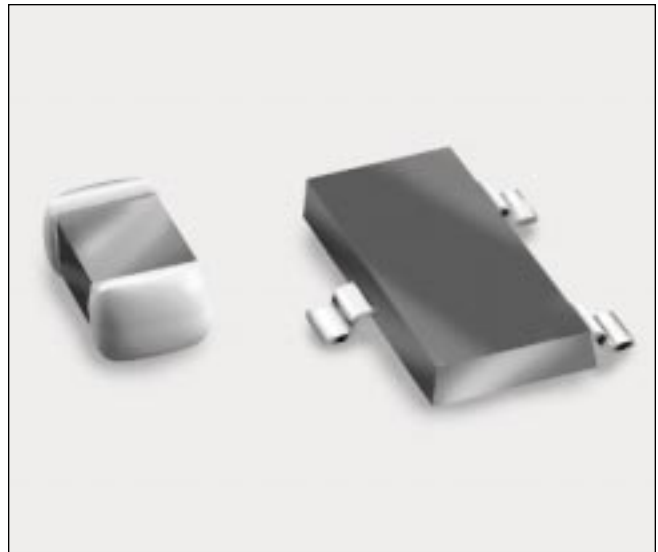

Specification Comparison

AVX StaticGuard 0805 0.1J

SOT-23

Bidirectional

Unidirectional
Bidirectional

Steady state power: 500MW

500MW

Repetitive strike: >50000 ESD

<100 unidirectional
 <1000 bidirectional

Voltage range: $\leq 18\text{V}$

5V - 69V

Peak current capability (8x20 μs): 30A

N/S

Vc $<50\text{V}$

11 - 85V

Capacitance: $<100\text{pF}$


60 - 550pF

Leakage current: $<10\mu\text{A}$ @ V_{wm}

$<100\mu\text{A}$ @ V_{wm}

0805 STATICGUARD


SOT 23 DIODE

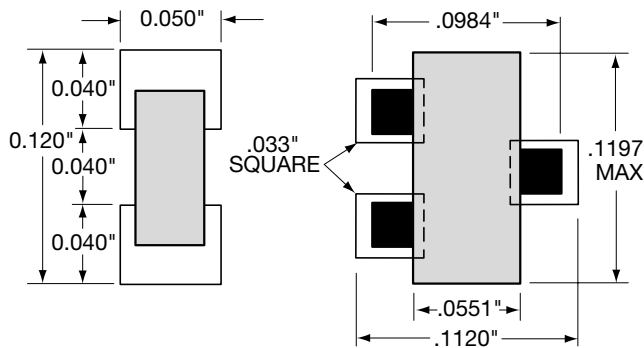


TOTAL AREA USED
0.006 SQ. IN.

TOTAL AREA USED
0.0134 SQ. IN.


TURN ON TIME COMPARISON STATICGUARD vs SOT-23

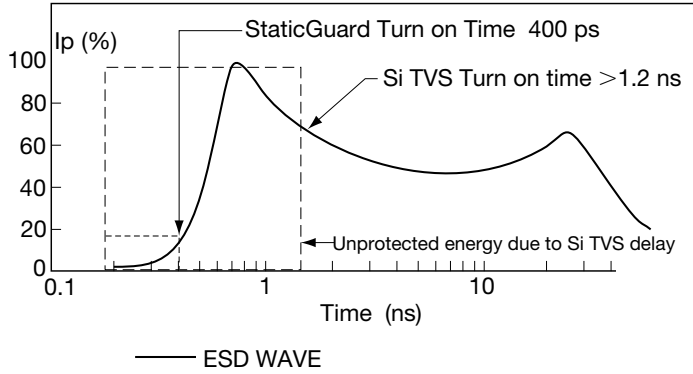


PEAK PULSE POWER vs PULSE DURATION STATICGUARD vs SOT 23

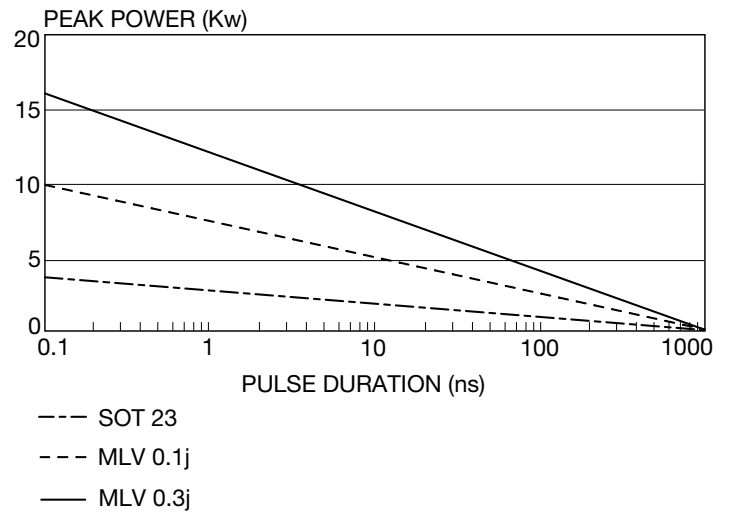

8 Kv CONTACT REPETITIVE STRIKE ESD TEST STATICGUARD vs SOT 23

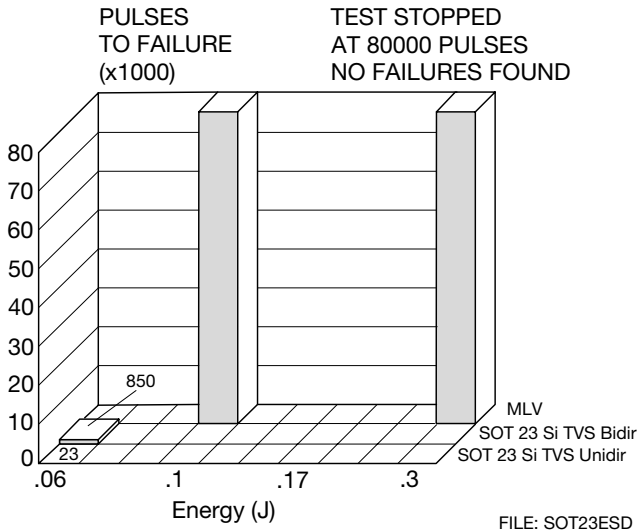

REPETITIVE STRIKE 8 x 20us 150a TEST STATICGUARD vs SOT 23

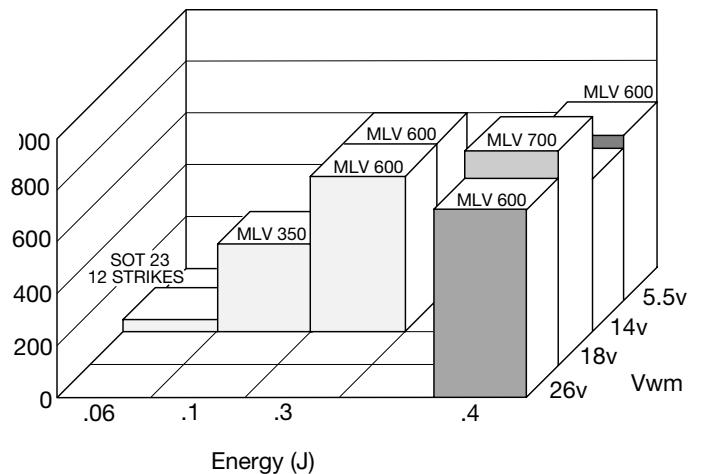

USA

**AVX Myrtle Beach, SC
Corporate Offices**
Tel: 843-448-9411
FAX: 843-626-5292

AVX Northwest, WA
Tel: 360-699-8746
FAX: 360-699-8751

AVX North Central, IN
Tel: 317-848-7153
FAX: 317-844-9314

AVX Mid/Pacific, MN
Tel: 952-974-9155
FAX: 952-974-9179

AVX Southwest, AZ
Tel: 480-539-1496
FAX: 480-539-1501

AVX South Central, TX
Tel: 972-669-1223
FAX: 972-669-2090

AVX Southeast, NC
Tel: 919-878-6223
FAX: 919-878-6462

AVX Canada
Tel: 905-564-8959
FAX: 905-564-9728

EUROPE

**AVX Limited, England
European Headquarters**
Tel: ++44 (0) 1252 770000
FAX: ++44 (0) 1252 770001

AVX S.A., France
Tel: ++33 (1) 69.18.46.00
FAX: ++33 (1) 69.28.73.87

AVX GmbH, Germany - AVX
Tel: ++49 (0) 8131 9004-0
FAX: ++49 (0) 8131 9004-44

AVX GmbH, Germany - Elco
Tel: ++49 (0) 2741 2990
FAX: ++49 (0) 2741 299133

AVX srl, Italy
Tel: ++390 (0)2 614571
FAX: ++390 (0)2 614 2576

AVX Czech Republic, s.r.o.
Tel: ++420 (0)467 558340
FAX: ++420 (0)467 558345

ASIA-PACIFIC

**AVX/Kyocera, Singapore
Asia-Pacific Headquarters**
Tel: (65) 258-2833
FAX: (65) 350-4880

AVX/Kyocera, Hong Kong
Tel: (852) 2-363-3303
FAX: (852) 2-765-8185

AVX/Kyocera, Korea
Tel: (82) 2-785-6504
FAX: (82) 2-784-5411

AVX/Kyocera, Taiwan
Tel: (886) 2-2696-4636
FAX: (886) 2-2696-4237

AVX/Kyocera, China
Tel: (86) 21-6249-0314-16
FAX: (86) 21-6249-0313

AVX/Kyocera, Malaysia
Tel: (60) 4-228-1190
FAX: (60) 4-228-1196

Elco, Japan
Tel: 045-943-2906/7
FAX: 045-943-2910

Kyocera, Japan - AVX
Tel: (81) 75-604-3426
FAX: (81) 75-604-3425

Kyocera, Japan - KDP
Tel: (81) 75-604-3424
FAX: (81) 75-604-3425

Contact:

NOTICE: Specifications are subject to change without notice. Contact your nearest AVX Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all applications.

© AVX Corporation



<http://www.avxcorp.com>

S-SPC2.5M395-N